


Atritor Turbo Separator TS2096 Model

Product Overview

The Turbo Separator is a flexible de-packaging system, developed to remove products from their packaging, releasing them for recycling or disposal.

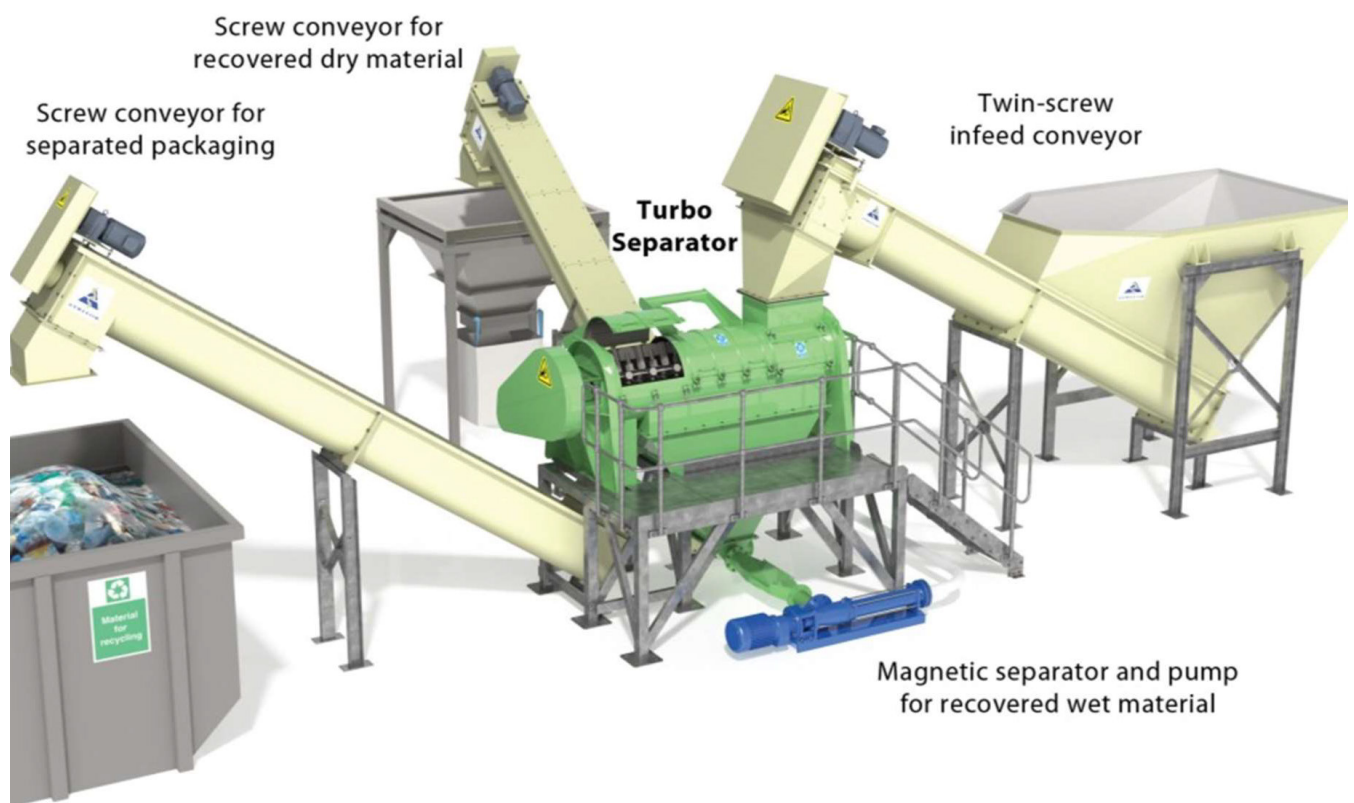

Typical Turbo Separator installation

Atritor Turbo Separator - Model Overview TS2096

Item	Value
Inlet size	18" x 18 " (455 x 455mm)
Fuse size (A)	120
Maximum throughput (Tonnes per hour)	5
Main drive motor (KW)	22
Chamber size	20" dia. x 96" long (508mm x 2,438mm)
Approx. footprint (incl. conveyors, can be configured)	14m x 7m
Construction	Mild Steel (Option: Stainless Steel)
Standard system comprises	Infeed hopper, infeed conveyor, Turbo Separator, Recovered organics outfeed conveyor, Recovered packaging outfeed conveyor, Control panel, Spare parts package, Commissioning. Optional pump for recovered liquid organics.
	
Typical packaging	Tin cans, plastic bottles, soft packaging, aluminium cans, sachets, pouches, polymer bags, paper bags, boxed products, Tetra Paks, plastic containers, trays, blister packs, tubes, cartons, plastic jars, cardboard containers, tea bags
Typical materials	Kitchen food waste, vegetables, beans, cigarettes, deodorants, processed meats, soups, beverages, coleslaw, detergents, pasta, potato chips, snack foods, sugar, biscuits, coffee, gravy granules, pet foods, powdered milk, tea, baby foods, cosmetics, flavourings, household products, water, pharmaceuticals, juices, cereals, custard, sauces, flour, yoghurt, soap power, shampoo, oil, paint, plasterboard and many more...

For further details, please contact Jeff Goodwin at Wastech Engineering.

Mobile: 0455 494547

Email: jgoodwin@wastech.com.au